

QUICK STUDY GUIDE

P.O. Box 414, Littleton CO 80160 | 303-347-8150 | Fax 303-347-8160

	Series	Pin Configuration(s)	Description
	SVK	13, 19, 25, 37, 54, 85, 100 & 150 pins	<i>Panel & inline; IP67 waterproof rated; MIL-C-5015 compliant; gold or silver contacts</i>
	SVS	72 & 101 pins	
	SHD	13, 19, 25, 37, 54, 85, 100 & 150 pins	<i>Roadline: Enhanced, robust, heavy-duty version of the SVK Series</i>
	SV	24 Audio & 6 Video (Coax) Pins	<i>Panel & Inline Audio/Video Hybrid Connectors; gold plated precision contacts</i>
	SMA	122 & 176 pins	<i>Hermaphroditic IP67 panel & inline audio, up to 56 channels; gold plated solder contacts</i>
	SPK	4, 8 & 19 pins	<i>Pro loudspeaker panel & inline; rubber locking ring; CA-COM mateable; silver & gold solder or crimp contacts</i>
	SPK8	8 pin	<i>Adapter; CA-COM 8 compatible; male one end, female other end</i>
	SB	2, 3, 4, 6, 7, 8 & 9 pins	<i>HMI Ballast & Lamp connector; 400W - 200KW; configurable; bayonet lock & coupling roller; silver plated contacts</i>
	SSX	19 & 16 pin UL & Industrial Versions	<i>Lighting connector; Socapex 419 compatible; panel & inline; fast wiring, indestructible; IP67; first make, last break gold or silver plated contacts</i>
	SPX	Single Pole High Amperage Power Connectors	<i>Power 400A - 750A; panel & inline; US, EU, UK & AU color codes; IP67; IP2X; high impact shell; silver plated contacts</i>
	SPZ		
	Cables	Application Specific Cables	<i>Expertly engineered pro audio & video features; power distribution; data</i>
	Drums	Cable Drums (featuring optional IO Side Panels)	
	Glands	Metric & PG types	<i>Glands, standard or spiral flex, metal, strain relief mesh grips, hanger grips</i>
	Tooling	Tooling & Accessories	<i>Contact us for more information</i>

v14.0


SSX 19 PIN - SPIDER




SYNTAX® SSX SPIDER 19 pin connector is an alternative version of the SSX 19 pin standard, studied to get simple managing of break-in and break-out operations.

The special 6-way rubber grommet, fitted in the cable gland terminal, guarantees optimal cable retention and a perfect watertight seal IP67 necessary for outdoor use.


Supplied with 6 **SYNTAX® MAINFLEX** cable leads, it represents the best solution to meet the requirements as for handling and waterproof IP67 protection.

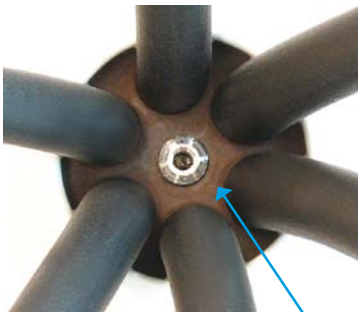

Moulded nut to insert/pull out the rubber grommet, using the removal tool

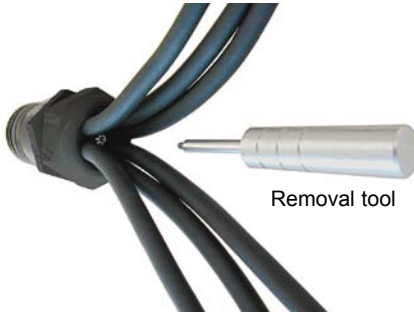

Removal tool

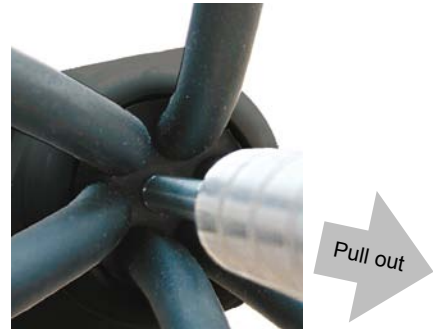

Pull out



SSX 19 PIN Lighting Cables



SP19M6FBL- 010 (1 mt) - **015** (1,5 mt) - **020** (2 mt)

SPIDER SPLITTER

Assembled list:

n.1	P/N :	SSX19MVYGCMS	Syntax SSX19 male
n.6	P/N :	Y213-6X	CEE17 16A 230V 3P female
mt	P/N :	7ZF0325	Syntax Cable 3 x 2.5 mm ²



SP6M19FBL- 010 (1 mt) - **015** (1,5 mt) - **020** (2 mt)

SPIDER SPLITTER

Assembled list:

n.1	P/N :	SSX19FV-GCMS	Syntax SSX19 female
n.6	P/N :	Y013-6X	CEE17 16A 230V 3P male
mt	P/N :	7ZF0325	Syntax Cable 3 x 2.5 mm ²



EC19P25-L...

EXTENSION CABLE

Assembled list:

1 x	P/N :	SSX19MVYGCP5N	Syntax SSX19 male
1 x	P/N :	SSX19FV-GCMS	Syntax SSX19 female
mt	P/N :	7ZF1925	Syntax Cable 19x2.5 mm ²

EC19P25-L10	10 mt cable lenght
EC19P25-L20	20 mt cable lenght
EC19P25-L...	cable lenght upon request